



# NVIDIA Quadro Professional Drivers ***Release 181 Notes***

## **Version 181.20**

**For Windows XP / 2000**

**Windows XP Professional x64 Edition**

**Windows Server 2003 x64 Edition**

**Document revision A**

---

**NVIDIA Corporation**  
**January 15, 2009**

Published by  
NVIDIA Corporation  
2701 San Tomas Expressway  
Santa Clara, CA 95050

## **Notice**

ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, NVIDIA Corporation assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NVIDIA Corporation. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. NVIDIA Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of NVIDIA Corporation.

## **Trademarks**

NVIDIA, the NVIDIA logo, 3DFX, 3DFX INTERACTIVE, the 3dfx Logo, STB, STB Systems and Design, the STB Logo, the StarBox Logo, NVIDIA nForce, GeForce, NVIDIA Quadro, NVDVD, NVIDIA Personal Cinema, NVIDIA Soundstorm, Vanta, TNT2, TNT, RIVA, RIVA TNT, VOODOO, VOODOO GRAPHICS, WAVEBAY, Accuvie Antialiasing, the Audio & Nth Superscript Design Logo, CineFX, the Communications & Nth Superscript Design Logo, Detonator, Digital Vibrance Control, DualNet, FlowFX, ForceWare, GIGADUDE, Glide, GOFORCE, the Graphics & Nth Superscript Design Logo, Intellisample, M-BUFFER, nfiniteFX, NV, NVChess, nView, NVKeystone, NVOptimizer, NVPinball, NVRotate, NVSensor, NVSync, the Platform & Nth Superscript Design Logo, PowerMizer, Quincunx Antialiasing, Sceneshare, See What You've Been Missing, StreamThru, SuperStability, T-BUFFER, The Way It's Meant to be Played Logo, TwinBank, TwinView and the Video & Nth Superscript Design Logo are registered trademarks or trademarks of NVIDIA Corporation in the United States and/or other countries. Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

Intel, Indeo, and Pentium are registered trademarks of Intel Corporation. Microsoft, Windows, Windows NT, Windows Vista, Direct3D, DirectDraw, and DirectX are trademarks or registered trademarks of Microsoft Corporation. OpenGL is a registered trademark of Silicon Graphics Inc. PCI Express, PCI-SIG, and the PCI-SIG design marks are registered trademarks and/or service marks of PCI-SIG.

Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

## **Copyright**

© 2009 by NVIDIA Corporation. All rights reserved.



# Table of Contents



## 1. Introduction to Release 181

### Notes

Structure of the Document . . . . . 1  
 Changes in this Edition . . . . . 1

## 2. Changes in the Release 181

### Driver for Windows XP

Version 181.20 Highlights . . . . . 4  
 What's New in Release 181 . . . . . 4  
 What's New in Version 181.20 . . . . . 4  
 Special Instructional Notes for this Release. . . . . 5  
 Turning Off V-Sync to Boost Performance . . . . . 5  
 NVIDIA Application Configuration Engine (ACE)  
 5  
 Changes in Version 181.20 . . . . . 6  
 Fixed Issues—Windows XP 32-bit . . . . . 6  
 Fixed Issues—Windows XP x64 . . . . . 7  
 Open Issues in Version 181.20 . . . . . 8  
 NVIDIA Recommendations. . . . . 8  
 Windows XP x86 Issues . . . . . 9  
 Windows XP x64 Issues . . . . . 10  
 Not NVIDIA Issues . . . . . 12

## 3. The Release 181 Driver for Windows XP

Hardware and Software Support . . . . . 13  
 Supported Operating Systems . . . . . 13  
 Supported NVIDIA Products . . . . . 14  
 Supported Languages . . . . . 15  
 Driver Installation . . . . . 16  
 System Requirements . . . . . 16  
 Installation Instructions. . . . . 16  
 Known Product Limitations . . . . . 19  
 SLI Connector Requirement on NVIDIA Quadro  
 SLI Cards. . . . . 20  
 Image Sharpening Control not Available with  
 Quadro FX 4600 and later GPUs. . . . . 20  
 DVD Playback Issues with Dual NVIDIA Quadro  
 NVS Cards . . . . . 20  
 PowerDVD 5.0 Does Not Display Correctly in  
 nView Span Mode . . . . . 20  
 DirectX Fails When Detaching/Reattaching  
 Displays in Dualview Mode. . . . . 21

OpenGL Viewport Scaling Problem in Horizontal  
 Span Mode . . . . . 21  
 Video Playback in nView Clone and Span  
 Modes . . . . . 22  
 Monitor Ordering in the Windows Settings Page  
 22  
 Applying Workstation Application Profiles . . . . . 23  
 No Antialiasing of 3DMark03 Image Quality  
 Screen Captures . . . . . 24  
 Windows XP/2000 Issue with Settings Tab  
 Monitor Positioning. . . . . 25  
 Antialiasing Problems With Certain Applications  
 25  
 Poor Quality S-Video Output on Some TVs . . . . . 25  
 AGP and PCI-E Programs May Hang With AMD  
 K7 and K8 Processors . . . . . 26  
 Desktop Manager Does Not Re-Center Logon  
 Screen . . . . . 26

## A. Mode Support for Windows

General Mode Support Information . . . . . 28  
 Default Modes Supported by GPU for Windows XP  
 29  
 Understanding the Mode Format . . . . . 29  
 NVIDIA Quadro FX 4400/4000/550/540 and  
 NVS 440/285 Family of GPUs . . . . . 30  
 NVIDIA Quadro FX 5600/4600/4700 X2/3700/  
 370 LP / NVS 450/420/295 and VX 200Family  
 of GPUs . . . . . 34  
 NVIDIA Quadro FX 1700/570/470/370/ NVS 290  
 Family of GPUs . . . . . 40  
 NVIDIA Quadro FX 5800/4800 Family of GPUs.  
 45  
 NVIDIA Quadro FX 5500/4500/4500 X2/3500/  
 1500/560/350 Family of GPUs. . . . . 47  
 TV-Out Modes Supported by TV Encoders. . . . . 52



# **Table of Contents**



## CHAPTER

## 1

# INTRODUCTION TO *RELEASE 181 NOTES*

This edition of *Release 181 Notes* describes the Release 181 Quadro Professional Graphics Drivers for Microsoft® Windows® XP. NVIDIA provides these notes to describe performance improvements and bug fixes in each documented version of the driver.

## Structure of the Document

---

This document is organized in the following sections:

- [“Changes in the Release 181 Driver for Windows XP” on page 3](#) gives a summary of changes, and fixed and open issues in this version.
- [“The Release 181 Driver for Windows XP” on page 13](#) describes the NVIDIA products and languages supported by this driver, the system requirements, and how to install the driver.
- [“Mode Support for Windows” on page 27](#) lists the default resolutions supported by the driver.

## Changes in this Edition

---

This edition of the *Release 181 Notes* for Windows XP includes information about NVIDIA Quadro Professional graphics driver version 181.20, and lists changes made to the driver since version 178.46. These changes are discussed beginning with the chapter [“Changes in the Release 181 Driver for Windows XP” on page 3](#).



## CHAPTER

## 2

# CHANGES IN THE RELEASE 181 DRIVER FOR WINDOWS XP

This chapter describes open issues for version 181.20, and resolved issues and driver enhancements for versions of the Release 181 driver up to version 181.20. The chapter contains these sections:

- “Version 181.20 Highlights” on page 4
- “Special Instructional Notes for this Release” on page 5
- “Changes in Version 181.20” on page 6
- “Open Issues in Version 181.20” on page 8
- “Not NVIDIA Issues” on page 12
- “Known Product Limitations” on page 19

## Version 181.20 Highlights

---

This section provides highlights of version 181.20 of the NVIDIA Release 181 Driver.

### What's New in Release 181

---

- Added support for the following NVIDIA products:
  - NVIDIA Quadro FX 470
  - NVIDIA Quadro CX
  - NVIDIA Quadro FX370 Low Profile
  - NVIDIA Quadro FX 4800
  - NVIDIA Quadro FX 5800
  - NVIDIA Quadro VX 200
  - NVIDIA Quadro NVS 450

### What's New in Version 181.20

---

#### Resolved Issues for Windows Vista

See [“Changes in Version 181.20” on page 6](#) for a list of resolved issues.

## Special Instructional Notes for this Release

---

This section clarifies certain features and controls.

### Turning Off V-Sync to Boost Performance

---

To get the best benchmark and application performance measurements, turn V-Sync off as follows:

- 1 Open the NVIDIA Control Panel and enable Advanced View.
- 2 In the 3D Settings Category, click Manage 3D Settings.
- 3 From the Global presets pulldown menu, select **Custom** and then click **Apply**.
- 4 From the Settings listbox, select **Vertical sync** and change its value to **Force off**, then click **Apply**.
- 5 From the Global presets pulldown menu, select **3D App - Default Global Settings** (the driver's default profile) or use the application profile that matches the application you are testing, then click **Apply**.

*Be sure to close the NVIDIA Control Panel completely* —leaving it open will affect benchmark and application performance.

### NVIDIA Application Configuration Engine (ACE)

---

This driver includes the NVIDIA Application Configuration Engine (ACE), which automatically detects the workstation application and configures the appropriate profile settings in the NVIDIA Control Panel.

See the *NVIDIA Quadro Professional Drivers: NVIDIA Control Panel Quick Start Guide* for more information about this feature.

## Changes in Version 181.20

---

The following sections list the changes made and issues resolved since driver version 178.46.

- “Fixed Issues–Windows XP 32-bit” on page 6
- “Fixed Issues–Windows XP x64” on page 7

The NVIDIA bug number is provided for reference.

### Fixed Issues–Windows XP 32-bit

---

#### Single-GPU Fixed Issues

- SolidMX 2D drawing data does not move smoothly.
- Allplan BIM 2008 is significantly slower compared to previous version (Allplan (2006).
- Maya 2009: driver versions and configurations need to be defined for the application in order to properly run in stereo.
- KOMPAS-3D V9 SP1 –the CAD software runs faster on a GeForce card when compared to a Quadro card.
- Quadro FX 5500: ArchiCAD12–the application disables antialiasing due to “insufficient video card resources”
- Quadro FX 4600/4800: Readpixel and drawpixel performance is poor.
- Quadro FX 4700 x2: OpenGL deadlock occurs when running in multiple threads.
- Quadro FX4700 x2: The driver is not reporting PCI-E bus information properly.
- Quadro FX 4800/NVS 290: The secondary Dualview HD display cannot be set to an HD format.
- Quadro FX 1800: DisplayPort output is corrupted in Dualview mode
- Quadro FX 4400/4000/3400/350, 3D Stereo: When using the Stereo Clone mode option, some graphics are missing from the right-hand screen.
- Dual Quadro NVS 290: The system hangs or crashes when running power management sleep/wake tests.
- Quadro FX 1700/3700: Pixel errors occur on the secondary Clone mode or Dualview mode display.
- Quadro FX 1700: SPECviewperf performance is slow using previous release 180 drivers.
- Quadro FX 1500: The GPU fan stays on at full speed after resume from Hibernate.
- Quadro NVS 450: One or both monitors do not return from Hibernate mode.

## Multi-GPU Fixed Issues

- Dual Quadro FX 570: SPEC viewperf dual-card performance has dropped.
- [Multi-GPU]: There is no application scaling when using glReadPixels() with GPU affinity.

## Fixed Issues—Windows XP x64

---

### Single-GPU Fixed Issues

- KOMPAS-3D V9 SP1 –the CAD software runs faster on a GeForce card when compared to a Quadro card.
- Quadro FX 3700: ProductView 9.1—"nvoglnt.dll" exception error occurs when running the application.
- Quadro FX 4700 x2: OpenGL deadlock occurs when running in multiple threads.

## Open Issues in Version 181.20

---

As with every released driver, version 181.20 of the Release 181 driver has open issues and enhancement requests associated with it. This section includes lists of issues that are either not fixed or not implemented in this version. Some problems listed may not have been thoroughly investigated and, in fact, may not be NVIDIA issues. Others will have workaround solutions.

They are listed in the following sections:

- “NVIDIA Recommendations” on page 8
- “Windows XP x86 Issues” on page 9
- “Windows XP x64 Issues” on page 10

### NVIDIA Recommendations

---

- Single display modes such as TV only, DFP/LCD only or CRT only provide the best performance and quality from Windows Media Center Edition.

*Dual display modes such Dualview and nView Clone and Span modes are not recommended.*

- When using the trial version of WinDVD 6 from InterVideo.com, you may experience TV or DVD playback problems in Windows Media Center if you change resolutions during video playback. This is most often seen when switching from windowed to full screen mode.

*This problem does not occur with the latest full OEM versions of WinDVD or with other Windows Media Center qualified DVD decoders.*

- If you perform a clean driver installation (no previous NVIDIA drivers installed), **you must reboot your computer**. If you do not reboot, the predefined application profiles will not be activated and you may experience application stability problems.

## Windows XP x86 Issues

---

This section includes issues that occur under the Windows XP or Windows 2000:

### Single-GPU Issues

- nView Desktop Manager: Minimized applications cannot be restored when the application taskbar icon is clicked.

*You can work around this bug using either of the following methods:*

- *Right-click the application taskbar icon and then click Restore, or*
- *Disable all title bar buttons from the nView Desktop Manager User Interface tab.*
- The online Help does not include information about workstation features.
- Rendering speed remains slow after closing resource-intensive applications.
- NVIDIA Control Panel->Workstation-> Frame Sync: The View Status Page does not detect which is the first and which is the second display attached to the GPU.
- Video color-space range for DVI-only<sup>1</sup> outputs is erroneously set to standard mode (16-235) instead of extended mode (0-255).

*A new detection feature to apply Standard CSC mode to TV outputs (including NTSC, PAL, 480i, and 576i), included DVI-only outputs by mistake.*

**Note:** *The driver correctly applies extended mode to analog outputs, and standard mode to TV outputs (including NTSC, PAL, 480i, and 576i).*

*A future driver release will correct this and apply the extended-mode color space to DVI-only outputs.*

*You can work around this issue by forcing either standard or extended mode as follows:*

- 1 Launch **regedit** and determine the current primary display card by looking in

**HKey\_Local\_Machine\Hardware\DeviceMap\Video**

and note the GUID (global unique identifier assigned by Windows), which is the long string in brackets { } at the end of the entry

"\device\video0".

- 2 Look in

**HKey\_Local\_Machine\SYSTEM\CurrentControlSet\Control\Video\{GUID}\0000**

1. "DVI-only" means only one display is connected, and it is to the DVI output.

where {GUID} is the number derived from the previous step.

**3** Open the "0000" directory and create a new DWORD called **VMRCCSStatus** and give it a value of

**0x3** - to force use of the standard YUV range of 16-235

**0x1** - to force use of the extended YUV range of 0-255

- Maya-Cgfx shader does not display correctly during playback
- Quadro FX 5600/1700: System crashes or hangs when running Catia application.
- Quadro FX 5600: The NVIDIA Control Panel custom resolution settings behave inconsistently.
- Quadro FX 5500: ArchiCAD12-Rotating Gradient fill while zooming is erroneous.
- Quadro FX 4700 X2: When four displays are enabled, one of the displays connected to the second GPU flashes.
- Quadro FX 4600: Intergraph Microstation v8 – a horizontal “ripple” or tear flows from the top to the bottom when using ISSD application profile.
- Quadro FX 4500/3500: Maya-cpvTransparencyTest no longer renders properly with Cg2.0+.
- Quadro 3700: Maya 2009-zoom extend is slow and laggy.
- Quadro FX 3500: Large FBOs are not drawn properly when using low-memory graphics cards.
- Quadro FX 3700/1700/570: The graphics cards do not work as the secondary GPUs.
- Quadro FX 1500: The graphics cards do not work as the secondary GPUs.
- Quadro FX 1500/1700/3700: I-DEAS – memory errors occur when working with large assemblies
- Quadro FX 1700, 3700 or 4600: There is video flickering, artifacts, and screen corruption when using VMR9 and GDI rendering simultaneously.
- Quadro FX 1700/3700: dCoder 2.0 - the application crashes when opening a QuickTime movie.
- Quadro FX 1400: Cadence Allegro 16.0-UI performance is slow when using OpenGL.

## Multi-GPU Issues

- NVIDIA Control Panel: When two graphics cards are installed, after changing properties from the NVIDIA Control Panel, the Apply button does not work until the system is rebooted.
- [SLI]: With SLI mode enabled, the NVIDIA Control Panel->Workstation->View Status page does not the correct monitor connections.

## Windows XP x64 Issues

---

### Single-GPU Issues

- SolidEdge (32-bit)–the application cannot determine the driver version under a non-administrator account.
- ICEM Surf 4.7.2–performance slow on 64-bit OS.
- FlightSimulator–lines (from a cloud pattern) show only in FSAA 8xMS mode, and not in 4xMS or 8xMS/8xCS antialiasing modes.
- Dual Quadro FX 5600: With four displays connected and used under Dualview mode, there is a drop in OpenGL application performance at high framebuffer usage.
- Quadro FX 4800/4600: When creating an OpenGL window with a 10-bit pixel format, the window has garbage drawn over it.
- Quadro FX 1700: CATIA V5 R18–the application crashes.

## Not NVIDIA Issues

---

This section lists issues that are not due to the NVIDIA driver.

- Linear interpolation on a 3D texture with format `GL_RGBA32F_ARB` produces banding.  
*This is not an NVIDIA driver bug, but a normal result of the filtering methods used by the hardware.*
- CATIA V5R18—there are no "Enable OpenGL Shader" options.  
*This is not an NVIDIA bug, but rather an issue with Windows XP SP2.*
- Windows Vista 64-bit: XSI - the application viewport doesn't refresh properly.  
*This is not an NVIDIA bug, but rather an issue with the application.*
- CATIA V5R18—Draft Analysis images are displayed incorrectly.  
*This is not an NVIDIA bug, but rather an issue with the application.*
- NVIDIA Quadro FX 570/1700: Catnap corrupts the projection matrix for the Reflect OpenGL Demo.  
*This is not an NVIDIA bug, but an issue with the OS—see [Microsoft KB 934198](#).  
To work around this problem, do not put the computer into standby when it is running a program that performs intense floating-point calculations.*
- Dual Quadro FX 3700: MicroStation—when both cards are set up in Spanning mode, an application runtime error occurs.

## CHAPTER

## 3

# THE RELEASE 181 DRIVER FOR WINDOWS XP

This chapter covers the following main topics:

- “Hardware and Software Support” on page 13
- “Driver Installation” on page 16

## Hardware and Software Support

---

### Supported Operating Systems

---

This Release 181 driver includes drivers designed for the following Microsoft® operating systems:

- Microsoft Windows® XP
  - Windows XP Professional
  - Windows XP Home Edition
  - Windows XP Professional x64 Edition
- Microsoft Windows Server 2003 x64 Edition<sup>1</sup>
- Microsoft Windows 2000

---

1. SLI mode is not supported under Microsoft Windows Server 2003 x64.

## Supported NVIDIA Products

Table 3.1 lists the NVIDIA workstation products supported by this Release 181 driver.

**Table 3.1** Supported NVIDIA Workstation Products

Product	Windows XP 32-bit Windows 2000	Windows XP Professional x64
NVIDIA Quadro FX 5800	X	X
NVIDIA Quadro FX 5600	X	X
NVIDIA Quadro FX 5500	X	X
NVIDIA Quadro FX 4800	X	X
NVIDIA Quadro FX 4700 X2	X	X
NVIDIA Quadro FX 4600	X	X
NVIDIA Quadro FX 4500 X2	X	X
NVIDIA Quadro FX 4500	X	X
NVIDIA Quadro FX 4400	X	X
NVIDIA Quadro FX 4000	X	X
NVIDIA Quadro FX 3700	X	X
NVIDIA Quadro FX 3500	X	X
NVIDIA Quadro FX 3450	X	X
NVIDIA Quadro FX 3400	X	X
NVIDIA Quadro FX 1700	X	X
NVIDIA Quadro FX 1500	X	X
NVIDIA Quadro FX 1400	X	X
NVIDIA Quadro FX 570	X	X
NVIDIA Quadro FX 560	X	X
NVIDIA Quadro FX 550	X	X
NVIDIA Quadro FX 540	X	X
NVIDIA Quadro FX 470	X	X
NVIDIA Quadro FX 370	X	X
NVIDIA Quadro FX 370 low profile	X	X
NVIDIA Quadro FX 350	X	X
NVIDIA Quadro CX	X	X
NVIDIA Quadro VX 200	X	X
NVIDIA Quadro NVS 450	X	X
NVIDIA Quadro NVS 440	X	X
NVIDIA Quadro NVS 290	X	X
NVIDIA Quadro NVS 285	X	X

## Supported Languages

---

The Release 181 Quadro Professional Drivers supports the following languages in the main driver Control Panel:

English (USA)	German	Portuguese (Euro/Iberian)
English (UK)	Greek	Russian
Arabic	Hebrew	Slovak
Chinese (Simplified)	Hungarian	Slovenian
Chinese (Traditional)	Italian	Spanish
Czech	Japanese	Spanish (Latin America)
Danish	Korean	Swedish
Dutch	Norwegian	Thai
Finnish	Polish	Turkish
French	Portuguese (Brazil)	

# Driver Installation

---

## System Requirements

---

The hard disk space requirement for 32 bit is minimum 68.3 MB for English-only, and 107 MB for International.

The hard disk space requirement for 64 bit is minimum 80 MB for English-only, and 117 MB for International.

## Installation Instructions

---

### Before You Begin

- **If NVIDIA nTune is already installed**

If you have previously installed NVIDIA nTune, NVIDIA recommends that you uninstall nTune before installing this driver. After the driver install is complete, you can reinstall nTune.

- If you do not have System Administrator access privileges, it is assumed that the appropriate person with System Administrator access in your organization will set up and install the NVIDIA graphics driver software on your computer.
- The installation process copies all necessary files for operation into the appropriate directories.
- The nView system files are copied to your **Windows\System** directory.
- nView Desktop Manager Profile files (\*.tvp) are saved in the **Windows\Nview** directory.

Depending on the version of the NVIDIA driver previously installed, profiles may also be located in the **Documents and Settings\All Users\Application Data\nView\_Profiles** directory.

- As part of the install process, an uninstall is registered in your system.
- Under Windows XP, the NVIDIA driver is installed in “Dualview mode” display. However, note that the second display is not activated by default, but must be enabled.

## Preserving Settings Before Upgrading Your Software

Before uninstalling or installing software, you can preserve your nView Desktop Manager and/or NVIDIA Display settings by using the nView Desktop Manager Profiles features.

**Note:** Follow the steps below and/or refer to the *NVIDIA nView Desktop Manager User's Guide* for details. Under Windows XP/2000 and Windows NT 4.0, you must have, at least, **Power User** access privileges in order to create or save a profile. (Refer to Windows Help if you need an explanation of Power User access rights.)

Follow the steps below and/or refer to the *NVIDIA nView Desktop Manager User's Guide* for details.

- 1 Open the nView Desktop Manager Profiles page (Figure 4.1).
- 2 To preserve your current settings, you can use either the **Save** or the **New** option from the nView Desktop Manager Profiles page:
  - If you want to overwrite the currently loaded profile with your changed settings, use the **Save** option. Notice that a warning message indicates that you are about to overwrite the selected profile.
  - If you want to retain the currently loaded profile and want to save your changed settings to a new file, click the **New** option. Enter a name and description of the profile in the New Profile dialog box. For example, you can name this profile **My Settings**.
- 3 If you are an “advanced” user and want to customize certain settings in the saved profile, click **Advanced** << to expand the dialog box (Figure 4.2).
- 4 To customize the settings, you can select or clear any of the settings check boxes.
- 5 Click **Save** to return to the main Profiles page.

If you created a new profile, you will see the name of the newly created profile in the profiles list.

If you overwrote a current profile, the same profile name is retained in the list.

**Note:** nView Desktop Manager profile (.tvp) files are saved in the **Windows\nView** directory. Depending on the version of the NVIDIA driver previously installed, profiles may also be saved in the **Documents and Settings\All Users\Application Data\ nView\_Profiles** directory.

- 6 Now you can uninstall your current driver for a driver upgrade.
- 7 After you restart your computer following an NVIDIA new driver install, you can easily load the saved profile from the Profiles page of nView Desktop Manager.

## About Using Saved Profiles in Another Computer

You can easily use any saved profile (.tvp file in the **Windows\nView** directory) from one computer and use it in another computer, if you want. You'll need to copy it to the **Windows\nView** directory of a computer that has the NVIDIA ForceWare graphics display driver, etc. installed properly. Then

this profile can be loaded from another computer from the nView Desktop Manager Profiles page just as it can from your original computer.

## Uninstalling the NVIDIA Display Driver Software

***Note:** It is highly recommended that you follow the steps in this section to completely uninstall the NVIDIA Display Driver software before updating to a new version of the software.*

To uninstall the nView software, follow these steps:

- 1 From the Windows taskbar, click **Start > Settings > Control Panel** to open the Control Panel window.
- 2 Double-click the **Add/Remove Programs** item.
- 3 Click the **NVIDIA Display Driver** item from the list.
- 4 Click **Change/Remove**.
- 5 Click **Yes** to continue.

A prompt appears asking whether you want to delete all of the saved nView profiles.

- If you click **Yes**, all of the nView software and all of your saved profiles will be deleted.
- If you click **No**, the nView software is removed, but the profile files are saved in the `Windows\nview` directory on your hard disk.

Your system now restarts.

## Installing the NVIDIA ForceWare Graphics Drivers

- 1 Follow the instructions on the NVIDIA .com Web site driver download page to locate the appropriate driver to download, based on your hardware and operating system.
- 2 Click the driver download link.  
The license agreement dialog box appears.
- 3 Click **Accept** if you accept the terms of the agreement, then either open the file or save the file to your PC and open it later.  
Opening the EXE file launches the NVIDIA InstallShield Wizard.
- 4 Follow the instructions in the NVIDIA InstallShield Wizard to complete the installation.

## Known Product Limitations

---

This section describes problems that will not be fixed. Usually, the source of the problem is beyond the control of NVIDIA. Following is the list of problems and where they are discussed in this document:

- “SLI Connector Requirement on NVIDIA Quadro SLI Cards” on page 20
- “Image Sharpening Control not Available with Quadro FX 4600 and later GPUs” on page 20
- “DVD Playback Issues with Dual NVIDIA Quadro NVS Cards” on page 20
- “PowerDVD 5.0 Does Not Display Correctly in nView Span Mode” on page 20
- “DirectX Fails When Detaching/Reattaching Displays in Dualview Mode” on page 21
- “OpenGL Viewport Scaling Problem in Horizontal Span Mode” on page 21
- “Video Playback in nView Clone and Span Modes” on page 22
- “Monitor Ordering in the Windows Settings Page” on page 22
- “Applying Workstation Application Profiles” on page 23
- “No Antialiasing of 3DMark03 Image Quality Screen Captures” on page 24
- “Windows XP/2000 Issue with Settings Tab Monitor Positioning” on page 25
- “Antialiasing Problems With Certain Applications” on page 25
- “Poor Quality S-Video Output on Some TVs” on page 25
- “AGP and PCI-E Programs May Hang With AMD K7 and K8 Processors” on page 26
- “Desktop Manager Does Not Re-Center Logon Screen” on page 26

## SLI Connector Requirement on NVIDIA Quadro SLI Cards

---

The SLI connector that links two SLI cards is needed for proper SLI operation. However, the connector can be removed if you do not intend to enable SLI mode. If you remove the connector, then you must make sure that SLI mode is disabled from the NVIDIA control panel. Enabling SLI mode without the SLI connector installed will result in video corruption.

## Image Sharpening Control not Available with Quadro FX 4600 and later GPUs

---

With Quadro FX 4600 and later graphics cards, the **Image sharpening** slider on the NVIDIA Control Panel-> Display->Adjust Desktop Color Settings page is grayed out.

This control is intentionally disabled because image sharpening is not supported on Quadro FX 4600 and later GPUs.

## DVD Playback Issues with Dual NVIDIA Quadro NVS Cards

---

With both AGP and PCI NVIDIA Quadro NVS cards installed in the system, when attempting to play DVDs in full-screen mode on the display connected to the PCI card, the screen is blank.

*This is not an NVIDIA bug, but rather a problem with older point releases of PowerDVD and WinDVD.*

## PowerDVD 5.0 Does Not Display Correctly in nView Span Mode

---

With nView Horizontal Span mode enabled, when the PowerDVD 5.0 playback window is dragged to the second display and then stretched to fill the display, the right area of the display is corrupted.

*This is not an NVIDIA bug, but a problem with PowerDVD.*

## DirectX Fails When Detaching/Reattaching Displays in Dualview Mode

---

This problem can be duplicated as follows:

- 1 Enable both displays in Dualview mode.
- 2 Detach monitor 2 and apply settings.
- 3 Reattach monitor 2 and apply settings.

DirectX runtime fails on monitor 1.

*This is not an NVIDIA bug, but a limitation in the operating system where DirectX does not enumerate the second device. DirectX can be restored to both displays by rebooting the system*

## OpenGL Viewport Scaling Problem in Horizontal Span Mode

---

With nView Horizontal Span mode enabled, when opening an OpenGL model in a viewport, the model image is scaled too large to fit in the viewport. The problem occurs with such applications as Maya 5.0 and 3D Studio MAX 4.26.

*This is not an NVIDIA bug, but a limitation in the application's ability to properly maintain the aspect ratio in Horizontal Span mode.*

## Video Playback in nView Clone and Span Modes

---

- **Problem**

With nView Clone or Span mode enabled, video playback appears on only one display under the following conditions:

- Under nView Clone mode, when full-screen video mirror is not used.
- Under nView Span mode, when full-screen video mirror is not used and the video is positioned to span across both monitors.

- **Explanation**

With applications that render using the hardware overlay—such as DirectX applications—the default driver behavior is to enable the hardware overlay when nView Clone or Span mode is enabled.

*Because the driver supports only one hardware overlay, the video appears on only one display.*

## Monitor Ordering in the Windows Settings Page

---

### Monitor Ordering on a Single GPU

- **Issue**

The monitor order in the Display Properties Settings page is not consistently matched with the connectors on the graphics card.

- **Explanation**

The driver does not distinguish connector positions, but instead distinguishes the display type, and consequently assigns monitor numbers according to the display type and not according to the connector.

### Monitor Ordering on a Multiple GPU System

- **Issue**

When four monitors are connected to a system with multiple PCI GPUs, such as a NVIDIA Quadro NVS 400 graphics card, and enabled in Dualview mode, many customers expect the monitor ordering in the Display Properties Settings page to conform to the following:

Connector Position	Monitor Number
Primary GPU—Output 1	1
Primary GPU—Output 2	2

Connector Position	Monitor Number
Secondary GPU—Output 1	3
Secondary GPU—Output 2	4

The monitor ordering, in fact, does not conform to this scheme.

- **Explanation**

The monitor ordering is not controlled by the driver, but rather by the Windows OS method of enumerating PCI devices. The Windows enumeration results in the following monitor numbering:

Connector Position	Monitor Number
Primary GPU—Output 1	1
Secondary GPU—Output 1	2
Primary GPU—Output 2	3
Secondary GPU—Output 2	4

**Considerations for nView Span Modes:** Outputs from the same GPUs are grouped together in nView Span modes, resulting in the desktop spanning across monitors 1 and 3, or across 2 and 4.

## Applying Workstation Application Profiles

---

- **Application Profiles Should be Used**

The workstation application profiles are software settings used by the NVIDIA Display Drivers to provide optimum performance when using a selected application. The profile also works around known application issues and bugs.

If there is an available setting for an application, it should be used, otherwise incorrect behavior or reduced performance is likely to occur.

- **Applying Application Profiles**

If you make a configuration change while the application is open, you must exit and then re-open the application for the change to take effect.

When an application is running it does not receive notification of configuration changes.

## No Antialiasing of 3DMark03 Image Quality Screen Captures

---

- **Problem**

After enabling antialiasing from the NVIDIA Properties page, 3DMark03 screen captures—obtained using the application’s screen capture function—might not be antialiased.

- **Explanation**

This is not an NVIDIA bug, but rather a result of different methods used to render antialiased images.

Depending on a combination of factors, the driver may take advantage of the NVIDIA hardware’s ability to bypass the front buffer while rendering an antialiased image. In this case, the front buffer does not contain antialiased data, so if an application takes data from the front buffer—as is the case with 3DMark03’s Image Quality screen captures—then the resulting image is not antialiased.

To accommodate applications that request use of the front buffer, the NVIDIA software can provide the antialiased data in a buffer to the application. Since this negates the advantages of the NVIDIA hardware capability, this support is enabled only when antialiasing is enabled within the application, and not from the NVIDIA control panel.

*In all cases when antialiasing is enabled, screen images as well as screen captures obtained using the Print Screen key are always antialiased.*

## Windows XP/2000 Issue with Settings Tab Monitor Positioning

---

- **Problem**

In the Windows **Display Properties > Settings** tab, the secondary monitors cannot be positioned directly above monitor #1 without snapping horizontally to a position diagonal to monitor #1.

- **When the Problem Occurs**

The problem occurs when four monitors are connected to the graphics adapter card, but only two of them are enabled.

- **Cause and Workaround**

This is a Microsoft—not an NVIDIA—bug, and there is no workaround to correct the positioning of the monitor icons. However, the actual positioning of the displays on the desktop can be corrected using the nView Desktop Manager window as follows:

- 1 Under the Tools tab in the Desktop Manager windows, make sure Automatically Align Displays is checked.
- 2 In the Settings tab, position the appropriate monitor icon above monitor #1, then click **Apply**.

The mouse cursor movement between monitor desktops will correspond to a vertical orientation of the monitors, even though the monitor icons in the Settings tab are diagonal to each other.

**Note:** This will be the case even if the monitor icons are deliberately positioned diagonal to each other.

## Antialiasing Problems With Certain Applications

---

Antialiasing in the NVIDIA Direct3D driver requires each new frame to be rendered from scratch. This requirement adversely affects applications that render only that portion of the content that has changed since the last frame. A common symptom of this problem is geometric structures that incorrectly disappear and re-appear as the scene shifts.

## Poor Quality S-Video Output on Some TVs

---

NVIDIA drivers differentiate an S-video TV from a composite TV by searching for 75-Ohm loads on the chrominance and luminance lines. If the driver detects only one such load, it assumes that it has a composite TV and drives both chroma and luma onto that line. This approach allows both types of TV to display in color.

Unfortunately, some S-video TVs do not apply the correct load to both lines, causing the driver to detect an S-video TV as a composite. The driver, in turn, sends the lower quality signal to the S-video TV. To work around this problem, use the Control Panel to override the **Auto-select** feature. This can be done following these steps:

- 1 In the **Settings** tab of the **Display Properties** Control Panel, click **Advanced**.
- 2 In the **nView** tab, click **Device Settings** and click **Select Output Device**.
- 3 In the **Device Selection** tab, click the **TV** option.
- 4 Change the **Video output format** to **S-video**.

## AGP and PCI-E Programs May Hang With AMD K7 and K8 Processors

---

- **Issue**

Microsoft® Windows® 2000 and Windows XP systems using AMD K7 and K8 processors can hang when an AGP or PCI-E program is used.

- **Root Cause**

There is a known problem with Microsoft® Windows® 2000 and Windows XP systems using AMD K7 and K8 CPUs that results in the Microsoft operating system allocating overlapping 4M cached pages with 4k write-combined pages. This condition results in undefined behavior and data corruption, and is explicitly disallowed by the AMD CPU manual.

This problem can affect any device driver in the system that allocates write-combined system memory, but is usually most easily reproduced with graphics drivers since graphics drivers generally make heavy use of write-combined system memory for performance reasons.

- **Resolution**

Microsoft has a knowledge base article on the issue, the text of which is unfortunately quite outdated. While the article only mentions Windows 2000, AGP, and K7, both the root cause and resolution also apply to Windows 2000 or Windows XP, AGP or PCI-E, and AMD K7 or K8. The article can be found at <http://support.microsoft.com/?id=270715>.

The issue is resolved by applying an operating system registry key as described in the referenced article that instructs the Microsoft operating system to not use the 4M pages, thus avoiding the conflict.

The registry key is automatically applied by installation of the latest NVIDIA nForce platform driver package (including 4.57 SMBUS or later). It is imperative for the package to be installed or for the registry key to be applied before the NVIDIA graphics driver or any other device drivers are installed. The registry key takes effect only after an operating system reboot.

## Desktop Manager Does Not Re-Center Logon Screen

---

On Windows XP multi-display systems that are set to nView Span mode, the Windows logon screen is centered on the extended desktop. This usually causes it to be split across two displays, which users may find annoying. Although users can normally use the Desktop Manager to restrict a window's appearance to one display, security restrictions in the operating systems prevent this in the case of the logon screen.

## APPENDIX



## MODE SUPPORT FOR WINDOWS

This chapter details the Windows modes supported by the Release 181 driver for NVIDIA products. It contains these sections:

- “General Mode Support Information” on page 28
- “Default Modes Supported by GPU for Windows XP” on page 29
- “TV-Out Modes Supported by TV Encoders” on page 52

## General Mode Support Information

---

The NVIDIA graphics driver includes a standard list of display modes that are supported by default. These modes are listed in the section “[Default Modes Supported by GPU for Windows XP](#)” on page 29.

The actual modes available depend on the capabilities of the display. In addition, the NVIDIA graphics driver has a “dynamic EDID detection” capability and will make available *additional* modes that are listed in the display EDID, provided the graphics hardware can support it.

The NVIDIA graphics driver also supports the high resolutions available with the displays listed in [Table A.1](#) as well as the non-standard modes listed in [Table A.2](#).

**Table A.1** Modes Supported for High Resolution Displays

Display	Maximum Resolution	Hardware Requirements
HP LP3065 Flat Panel Monitor (Dual-link DVI)	2560×1600 @ 60 Hz	<ul style="list-style-type: none"> <li>All high-end NVIDIA Quadro FX graphic solutions.</li> </ul>
Apple 30" Cinema HD Display (Dual link DVI)	2560x1600 @ 60 Hz	
Dell WFP 3007 (Dual Link DVI)	2560x1600 @ 60 Hz	

**Table A.2** Non-standard Modes Supported

Resolution
1680 x 1050
1366 x 768

## Default Modes Supported by GPU for Windows XP

---


This section lists the modes that are included by default in the driver INF for the following product families:

- “NVIDIA Quadro FX 4400/4000/550/540 and NVS 440/285 Family of GPUs” on page 30
- “NVIDIA Quadro FX 5600/4600/4700 X2/3700/370 LP / NVS 450/420/295 and VX 200 Family of GPUs” on page 34
- “NVIDIA Quadro FX 1700/570/470/370/ NVS 290 Family of GPUs” on page 40
- “NVIDIA Quadro FX 5800/4800 Family of GPUs” on page 45
- “NVIDIA Quadro FX 5500/4500/4500 X2/3500/1500/560/350 Family of GPUs” on page 47

### Understanding the Mode Format

---

Figure A.1 gives an example of how to read the mode information presented in this section.

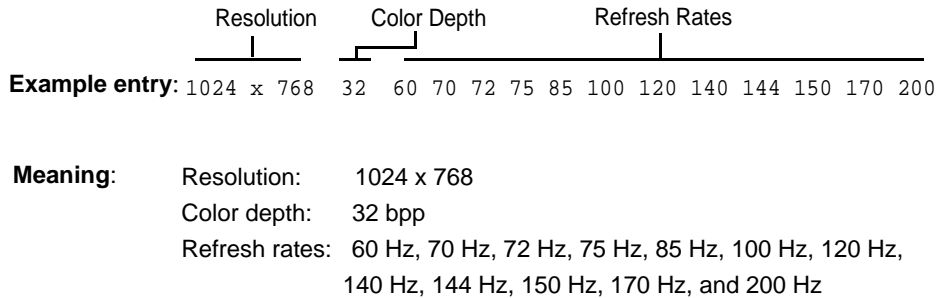

**Figure A.1** Mode Format

**Note:**

- Horizontal spanning modes of 3840x1080 and above, and vertical spanning modes of 1920x2160 and above generally require at least 32 MB of video memory at 32 bpp.
- An “i” next to the refresh rate indicates an interlaced refresh rate.

## NVIDIA Quadro FX 4400/4000/550/540 and NVS 440/285 Family of GPUs

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 3400/4400
- NVIDIA Quadro FX 4000
- NVIDIA Quadro NVS 440
- NVIDIA Quadro FX 550
- NVIDIA Quadro FX 540
- NVIDIA Quadro NVS 285

### Standard Modes

640 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8		60
720 x 576	8	50	60
800 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1280 x 1024	8		70
1440 x 900	8		60
1600 x 1200	8		70
1680 x 1050	8		60
1920 x 1440	8		60 70 72 75 85 100
2048 x 1536	8		60 70 72 75 85 100

---

640 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16		60
720 x 576	16	50	60
800 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	16		60 70 72 75 85 100 120 140 144 150 170 200 240

1152 x 864	16		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 720	16		60	70	72	75	85	100	120	140	144	150	170		
1280 x 768	16		60	70	72	75	85	100	120	140	144	150	170	200	240
1280 x 1024	16			70											
1440 x 900	16		60												
1600 x 1200	16			70											
1680 x 1050	16		60												
1920 x 1440	16		60	70	72	75	85	100							
2048 x 1536	16		60	70	72	75	85	100							

---

640 x 480	32		60	70	72	75	85	100	120	140	144	150	170	200	240
720 x 480	32		60												
720 x 576	32	50	60												
800 x 600	32		60	70	72	75	85	100	120	140	144	150	170	200	240
848 x 480	32		60	70	72	75	85	100	120	140	144	150	170	200	240
960 x 600	32		60	70	72	75	85	100	120	140	144	150	170	200	240
1024 x 768	32			70											
1152 x 864	32		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 768	32		60	70	72	75	85	100	120	140	144	150	170		
1280 x 1024	32			70											
1440 x 900	32		60												
1600 x 1200	32			70											
1680 x 1050	32		60												
1920 x 1440	32		60	70	72	75	85	100							
2048 x 1536	32		60	70	72	75	85	100							

## Horizontal Spanning Modes

1280 x 480	8		60	70	72	75	85	100	120	140	144	150	170	200	240
1600 x 600	8		60	70	72	75	85	100	120	140	144	150	170	200	240
1696 x 480	8		60	70	72	75	85	100	120	140	144	150	170	200	240
1920 x 600	8		60	70	72	75	85	100	120	140	144	150	170	200	240
2048 x 768	8		60	70	72	75	85	100	120	140	144	150	170	200	240
2304 x 864	8		60	70	72	75	85	100	120	140	144	150	170	200	
2560 x 720	8		60	70	72	75	85	100	120	140	144	150	170		
2560 x 768	8		60	70	72	75	85	100	120	140	144	150	170	200	240
2880 x 900	8		60												
3360 x 1050	8		60												

3840 x 1440	8	60 70 72 75 85
4096 x 1536	8	60 70 72 75 85
-----		
1280 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16	60 70 72 75 85 100 120 140 144 150 170
2560 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2880 x 900	16	60
3360 x 1050	16	60
3840 x 1440	16	60 70 72 75 85
4096 x 1536	16	60 70 72 75 85
-----		
1280 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	32	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 768	32	60 70 72 75 85 100 120 140 144 150 170
2880 x 900	32	60
3360 x 1050	32	60
3840 x 1440	32	60 70 72 75 85
4096 x 1536	32	60 70 72 75 85

### Vertical Spanning Modes

640 x 960	8	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	8	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1440 x 1800	8	60

1680 x 2100	8	60
1920 x 2880	8	60 70 72 75 85
2048 x 3072	8	60 70 72 75 85

---

640 x 960	16	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	16	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16	60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1440 x 1800	16	60
1680 x 2100	16	60
1920 x 2880	16	60 70 72 75 85
2048 x 3072	16	60 70 72 75 85

---

640 x 960	32	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	32	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	32	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1536	32	60 70 72 75 85 100 120 140 144 150 170
1440 x 1800	32	60
1680 x 2100	32	60
1920 x 2880	32	60 70 72 75 85
2048 x 3072	32	60 70 72 75 85

## **NVIDIA Quadro FX 5600/4600/4700 X2/3700/370 LP / NVS 450/420/295 and VX 200 Family of GPUs**

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 5600
- NVIDIA Quadro FX 4600
- NVIDIA Quadro FX 4700 X2
- NVIDIA Quadro FX 3700
- NVIDIA Quadro VX 200
- NVIDIA Quadro NVS 420
- NVIDIA Quadro FX 370 LP
- NVIDIA Quadro NVS 450
- NVIDIA Quadro NVS 295

### **Standard Modes**

640 x 480	8		60	72	75	85	100		
720 x 480	8		60						
720 x 576	8		50	60					
800 x 600	8		60	72	75	85	100		
1024 x 768	8		60	70	72	75	85	100	
1152 x 864	8		60	70	72	75	85	100	120 140 144 150 170 200
1280 x 720	8		60	70	72	75	85	100	
1280 x 768	8		60	70	72	75	85	100	
1280 x 800	8		60	70	72	75	85	100	
1280 x 960	8		60	70	72	75	85	100	
1280 x 1024	8		60	70	72	75	85	100	
1360 x 768	8		60	70	72	75	85	100	
1440 x 900	8		60						
1600 x 1200	8		60	70	72	75	85	100	
1680 x 1050	8		60						
1920 x 1080	8		30i						
1920 x 1200	8		60	72	75	85	100		
1920 x 1440	8		60	70	72	75	85	100	
2048 x 1536	8		60	70	72	75	85	100	

```

-----
640 x 480 16          60   72 75 85 100
720 x 480 16          60
720 x 576 16         50 60
800 x 600 16          60   72 75 85 100
1024 x 768 16         60 70 72 75 85 100
1152 x 864 16         60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720 16         60 70 72 75 85 100
1280 x 768 16         60 70 72 75 85 100
1280 x 800 16         60 70 72 75 85 100
1280 x 960 16         60 70 72 75 85 100
1280 x 1024 16        60 70 72 75 85 100
1360 x 768 16         60 70 72 75 85 100
1440 x 900 16         60
1600 x 1200 16        60 70 72 75 85 100
1680 x 1050 16        60
1920 x 1080 16       30i
1920 x 1200 16        60   72 75 85 100
1920 x 1440 16        60 70 72 75 85 100
2048 x 1536 16        60 70 72 75 85 100
-----

```

```

-----
640 x 480 32          60   72 75 85 100
720 x 480 32          60
720 x 576 32         50 60
800 x 600 32          60   72 75 85 100
1024 x 768 32         60 70 72 75 85 100
1152 x 864 32         60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720 32         60 70 72 75 85 100
1280 x 768 32         60 70 72 75 85 100
1280 x 800 32         60 70 72 75 85 100
1280 x 960 32         60 70 72 75 85 100
1280 x 1024 32        60 70 72 75 85 100
1360 x 768 32         60 70 72 75 85 100
1440 x 900 32         60
1600 x 1200 32        60 70 72 75 85 100
1680 x 1050 32        60
1920 x 1080 32       30i
1920 x 1200 32        60   72 75 85
1920 x 1440 32        60 70   75 85 100
-----

```

2048 x 1536	32		60	70	75	85	100												
-----																			
640 x 480	64		60		72	75	85	100											
720 x 480	64		60																
720 x 576	64		50	60															
800 x 600	64		60		72	75	85	100											
1024 x 768	64		60	70	72	75	85	100											
1152 x 864	64		60	70	72	75	85	100	120	140	144	150	170	200					
1280 x 720	64		60	70	72	75	85	100											
1280 x 768	64		60	70	72	75	85	100											
1280 x 800	64		60	70	72	75	85	100											
1280 x 960	64		60	70	72	75	85	100											
1280 x 1024	64		60	70	72	75	85	100											
1360 x 768	64		60	70	72	75	85	100											
1440 x 900	64		60																
1600 x 1200	64		60	70	72	75	85	100											
1680 x 1050	64		60																
1920 x 1080	64	30i																	
1920 x 1440	64																		100
2048 x 1536	64																		100

## Horizontal Spanning Modes

1280 x 480	8		60		72	75	85	100												
1600 x 600	8		60		72	75	85	100												
2048 x 768	8		60		72	75	85	100												
2304 x 864	8		60	70	72	75	85	100	120	140	144	150	170	200						
2560 x 720	8		60		72	75	85	100												
2560 x 768	8		60		72	75	85	100												
2560 x 800	8		60		72	75	85	100												
2560 x 960	8		60		72	75	85	100												
2560 x 1024	8		60		72	75	85	100												
2720 x 768	8		60		72	75	85	100												
2880 x 900	8		60																	
3200 x 1200	8		60		72	75	85	100												
3360 x 1050	8		60																	
3840 x 1080	8	30i																		
3840 x 1200	8		60		72	75	85	100												

3840 x 1440	8		60	72	75	85													
4096 x 1536	8		60	72	75														
-----																			
1280 x 480	16		60	72	75	85	100												
1600 x 600	16		60	72	75	85	100												
2048 x 768	16		60	72	75	85	100												
2304 x 864	16		60	70	72	75	85	100	120	140	144	150	170	200					
2560 x 720	16		60	72	75	85	100												
2560 x 768	16		60	72	75	85	100												
2560 x 800	16		60	72	75	85	100												
2560 x 960	16		60	72	75	85	100												
2560 x 1024	16		60	72	75	85	100												
2720 x 768	16		60	72	75	85	100												
2880 x 900	16		60																
3200 x 1200	16		60	72	75	85	100												
3360 x 1050	16		60																
3840 x 1080	16	30i																	
3840 x 1200	16		60	72	75	85	100												
3840 x 1440	16		60	72	75	85													
4096 x 1536	16		60	72	75														
-----																			
1280 x 480	32		60	72	75	85	100												
1600 x 600	32		60	72	75	85	100												
2048 x 768	32		60	72	75	85	100												
2304 x 864	32		60	70	72	75	85	100	120	140	144	150	170	200					
2560 x 720	32		60	72	75	85	100												
2560 x 768	32		60	72	75	85	100												
2560 x 800	32		60	72	75	85	100												
2560 x 960	32		60	72	75	85	100												
2560 x 1024	32		60	72	75	85	100												
2720 x 768	32		60	72	75	85	100												
2880 x 900	32		60																
3200 x 1200	32		60	72	75	85	100												
3360 x 1050	32		60																
3840 x 1080	32	30i																	
3840 x 1200	32		60	72	75	85													
3840 x 1440	32		60	75															
4096 x 1536	32		60																

## Vertical Spanning Modes

640 x 960	8		60	72	75	85	100										
800 x 1200	8		60	72	75	85	100										
1024 x 1536	8		60	72	75	85	100										
1152 x 1728	8		60	70	72	75	85	100	120	140	144	150	170	200			
1280 x 1440	8		60	72	75	85	100										
1280 x 1536	8		60	72	75	85	100										
1280 x 1600	8		60	72	75	85	100										
1280 x 1920	8		60	72	75	85	100										
1280 x 2048	8		60	72	75	85	100										
1360 x 1536	8		60	72	75	85	100										
1440 x 1800	8		60														
1600 x 2400	8		60	72	75	85	100										
1680 x 2100	8		60														
1920 x 2160	8	30i															
1920 x 2400	8		60	72	75	85	100										
1920 x 2880	8		60	72	75	85											
2048 x 3072	8		60	72	75												

---

640 x 960	16		60	72	75	85	100										
800 x 1200	16		60	72	75	85	100										
1024 x 1536	16		60	72	75	85	100										
1152 x 1728	16		60	70	72	75	85	100	120	140	144	150	170	200			
1280 x 1440	16		60	72	75	85	100										
1280 x 1536	16		60	72	75	85	100										
1280 x 1600	16		60	72	75	85	100										
1280 x 1920	16		60	72	75	85	100										
1280 x 2048	16		60	72	75	85	100										
1360 x 1536	16		60	72	75	85	100										
1440 x 1800	16		60														
1600 x 2400	16		60	72	75	85	100										
1680 x 2100	16		60														
1920 x 2160	16	30i															
1920 x 2400	16		60	72	75	85	100										
1920 x 2880	16		60	72	75	85											
2048 x 3072	16		60	72	75												

---

640 x 960	32		60	72	75	85	100										
-----------	----	--	----	----	----	----	-----	--	--	--	--	--	--	--	--	--	--

800 x 1200	32		60	72	75	85	100												
1024 x 1536	32		60	72	75	85	100												
1152 x 1728	32		60	70	72	75	85	100	120	140	144	150	170	200					
1280 x 1440	32		60	72	75	85	100												
1280 x 1536	32		60	72	75	85	100												
1280 x 1600	32		60	72	75	85	100												
1280 x 1920	32		60	72	75	85	100												
1280 x 2048	32		60	72	75	85	100												
1360 x 1536	32		60	72	75	85	100												
1440 x 1800	32		60																
1600 x 2400	32		60	72	75	85	100												
1680 x 2100	32		60																
1920 x 2160	32	30i																	
1920 x 2400	32		60	72	75	85													
1920 x 2880	32		60	75															
2048 x 3072	32		60																

## NVIDIA Quadro FX 1700/570/470/370/ NVS 290 Family of GPUs

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 370
- NVIDIA Quadro FX 570
- NVIDIA Quadro FX 1700
- NVIDIA Quadro NVS 290
- NVIDIA Quadro FX 470

### Standard Modes

640 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8	60
720 x 576	8 50	60
800 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1024	8	70
1440 x 900	8	60
1600 x 1200	8	70
1680 x 1050	8	60
1920 x 1440	8	60 70 72 75 85 100
2048 x 1536	8	60 70 72 75 85 100

---

640 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16	60
720 x 576	16 50	60
800 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	16	60 70 72 75 85 100 120 140 144 150 170 200

1280 x 720	16		60	70	72	75	85	100	120	140	144	150	170		
1280 x 768	16		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 1024	16		70												
1440 x 900	16		60												
1600 x 1200	16		70												
1680 x 1050	16		60												
1920 x 1440	16		60	70	72	75	85	100							
2048 x 1536	16		60	70	72	75	85	100							
-----															
640 x 480	32		60	70	72	75	85	100	120	140	144	150	170	200	240
720 x 480	32		60												
720 x 576	32	50	60												
800 x 600	32		60	70	72	75	85	100	120	140	144	150	170	200	240
848 x 480	32		60	70	72	75	85	100	120	140	144	150	170	200	240
960 x 600	32		60	70	72	75	85	100	120	140	144	150	170	200	240
1024 x 768	32		70												
1152 x 864	32		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 768	32		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 1024	32		70												
1440 x 900	32		60												
1600 x 1200	32		70												
1680 x 1050	32		60												
1920 x 1440	32		60	70	72	75	85	100							
2048 x 1536	32		60	70	72	75	85	100							
-----															
640 x 480	64		60	70	72	75	85	100	120	140	144	150	170	200	240
720 x 480	64		60												
720 x 576	64	50	60												
800 x 600	64		60	70	72	75	85	100	120	140	144	150	170	200	240
848 x 480	64		60	70	72	75	85	100	120	140	144	150	170	200	240
960 x 600	64		60	70	72	75	85	100	120	140	144	150	170	200	240
1024 x 768	64		70												
1152 x 864	64		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 768	64		60	70	72	75	85	100	120	140	144	150	170	200	
1280 x 1024	64		70												
1440 x 900	64		60												
1600 x 1200	64		70												
1680 x 1050	64		60												
1920 x 1440	64							100							

2048 x 1536 64

100

### Horizontal Spanning Modes

1280 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	8	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	8	60 70 72 75 85 100 120 140 144 150 170
2560 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200
2880 x 900	8	60
3360 x 1050	8	60
3840 x 1440	8	60 70 72 75 85
4096 x 1536	8	60 70 72 75 85

---

1280 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16	60 70 72 75 85 100 120 140 144 150 170
2560 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200
2880 x 900	16	60
3360 x 1050	16	60
3840 x 1440	16	60 70 72 75 85
4096 x 1536	16	60 70 72 75 85

---

1280 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	32	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 768	32	60 70 72 75 85 100 120 140 144 150 170 200
2880 x 900	32	60
3360 x 1050	32	60

```
3840 x 1440 32      60 70 72 75 85
4096 x 1536 32      60 70 72 75 85
```

## Vertical Spanning Modes

```
640 x 960 8      60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200 8     60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960 8      60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200 8     60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536 8    60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728 8    60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440 8    60 70 72 75 85 100 120 140 144 150 170
1280 x 1536 8    60 70 72 75 85 100 120 140 144 150 170 200
1440 x 1800 8    60
1680 x 2100 8    60
1920 x 2880 8    60 70 72 75 85
2048 x 3072 8    60 70 72 75 85
```

```
-----
640 x 960 16     60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200 16    60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960 16     60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200 16    60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536 16   60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728 16   60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440 16   60 70 72 75 85 100 120 140 144 150 170
1280 x 1536 16   60 70 72 75 85 100 120 140 144 150 170 200
1440 x 1800 16   60
1680 x 2100 16   60
1920 x 2880 16   60 70 72 75 85
2048 x 3072 16   60 70 72 75 85
```

```
-----
640 x 960 32     60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200 32    60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960 32     60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200 32    60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728 32   60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1536 32   60 70 72 75 85 100 120 140 144 150 170 200
1440 x 1800 32   60
```

1680 x 2100	32	60					
1920 x 2880	32	60	70	72	75	85	
2048 x 3072	32	60	70	72	75	8	

## NVIDIA Quadro FX 5800/4800 Family of GPUs

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 5800
- NVIDIA Quadro FX 4800

### Standard Modes

640 x 480	8	60
800 x 600	8	60 70 75 85 100
848 x 480	8	60 70 75 85 100
960 x 600	8	60 70 75 85 100
1024 x 768	8	60 70 75 85 100
1152 x 864	8	60 70 75 85 100
1280 x 768	8	60
1280 x 800	8	60
1280 x 960	8	60 70 75 85 100
1280 x 1024	8	60 70 75 85 100
1360 x 768	8	60
1600 x 1200	8	60 70 75 85 100
1680 x 1050	8	60
1920 x 1200	8	60
1920 x 1440	8	60 70 75 85 100
2048 x 1536	8	60 70 75 85 100

---

640 x 480	16	60
800 x 600	16	60 70 75 85 100
848 x 480	16	60 70 75 85 100
960 x 600	16	60 70 75 85 100
1024 x 768	16	60 70 75 85 100
1152 x 864	16	60 70 75 85 100
1280 x 768	16	60
1280 x 800	16	60
1280 x 960	16	60 70 75 85 100
1280 x 1024	16	60 70 75 85 100
1360 x 768	16	60

1600 x 1200	16	60	70	75	85	100
1680 x 1050	16	60				
1920 x 1200	16	60				
1920 x 1440	16	60	70	75	85	100
2048 x 1536	16	60	70	75	85	100

---

640 x 480	32	60				
800 x 600	32	60	70	75	85	100
848 x 480	32	60	70	75	85	100
960 x 600	32	60	70	75	85	100
1024 x 768	32	60	70	75	85	100
1152 x 864	32	60	70	75	85	100
1280 x 768	32	60				
1280 x 800	32	60				
1280 x 960	32	60	70	75	85	100
1280 x 1024	32	60	70	75	85	100
1360 x 768	32	60				
1600 x 1200	32	60	70	75	85	100
1680 x 1050	32	60				
1920 x 1200	32	60				
1920 x 1440	32	60	70	75	85	100
2048 x 1536	32	60	70	75	85	100

---

640 x 480	64	60				
800 x 600	64	60	70	75	85	100
848 x 480	64	60	70	75	85	100
960 x 600	64	60	70	75	85	100
1024 x 768	64	60	70	75	85	100
1152 x 864	64	60	70	75	85	100
1280 x 768	64	60				
1280 x 800	64	60				
1280 x 960	64	60	70	75	85	100
1280 x 1024	64	60	70	75	85	100
1360 x 768	64	60				
1600 x 1200	64	60	70	75	85	100
1680 x 1050	64	60				
1920 x 1200	64	60				
1920 x 1440	64	60	70	75	85	100
2048 x 1536	64	60	70	75	85	100

## NVIDIA Quadro FX 5500/4500/4500 X2/3500/1500/560/350 Family of GPUs

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 4500
- NVIDIA Quadro FX 350
- NVIDIA Quadro FX 5500
- NVIDIA Quadro FX 3500
- NVIDIA Quadro FX 1500
- NVIDIA Quadro FX 4500 X2
- NVIDIA Quadro FX 560

### Standard Modes

640 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8	60
720 x 576	8	50 60
800 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	8	70
1440 x 900	8	60
1600 x 1200	8	70
1680 x 1050	8	60
1920 x 1200	8	60 70 72 75 85 100
1920 x 1440	8	60 70 72 75 85 100
2048 x 1536	8	60 70 72 75 85 100
-----		
640 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16	60

```

720 x 576 16 50 60
800 x 600 16 60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480 16 60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600 16 60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768 16 60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864 16 60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720 16 60 70 72 75 85 100 120 140 144 150 170
1280 x 768 16 60 70 72 75 85 100 120 140 144 150 170
1280 x 1024 16 70
1440 x 900 16 60
1600 x 1200 16 70
1680 x 1050 16 60
1920 x 1200 16 60 70 72 75 85 100
1920 x 1440 16 60 70 72 75 85 100
2048 x 1536 16 60 70 72 75 85 100

```

```

-----
640 x 480 32 60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480 32 60
720 x 576 32 50 60
800 x 600 32 60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480 32 60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600 32 60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768 32 70
1152 x 864 32 60 70 72 75 85 100 120 140 144 150 170 200
1280 x 768 32 60 70 72 75 85 100 120 140 144 150 170
1280 x 1024 32 70
1440 x 900 32 60
1600 x 1200 32 70
1680 x 1050 32 60
1920 x 1200 32 60 70 72 75 85 100
1920 x 1440 32 60 70 72 75 85 100
2048 x 1536 32 60 70 72 75 85 100

```

### Horizontal Spanning Modes

```

1280 x 480 8 60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600 8 60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480 8 60 70 72 75 85 100 120 140 144 150 170 200 240

```

1920 x 600	8	60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	8	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	8	60 70 72 75 85 100 120 140 144 150 170
2560 x 768	8	60 70 72 75 85 100 120 140 144 150 170
2880 x 900	8	60
3360 x 1050	8	60
3840 x 1200	8	60 70 72 75 85
3840 x 1440	8	60 70 72 75 85
4096 x 1536	8	60 70 72 75 85

---

1280 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	16	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16	60 70 72 75 85 100 120 140 144 150 170
2560 x 768	16	60 70 72 75 85 100 120 140 144 150 170
2880 x 900	16	60
3360 x 1050	16	60
3840 x 1200	16	60 70 72 75 85
3840 x 1440	16	60 70 72 75 85
4096 x 1536	16	60 70 72 75 85

---

1280 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	32	60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	32	60 70 72 75 85 100 120 140 144 150 170 200
2560 x 768	32	60 70 72 75 85 100 120 140 144 150 170
2880 x 900	32	60
3360 x 1050	32	60
3840 x 1200	32	60 70 72 75 85
3840 x 1440	32	60 70 72 75 85
4096 x 1536	32	60 70 72 75 85

## Vertical Spanning Modes

640 x 960	8	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	8	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	8	60 70 72 75 85 100 120 140 144 150 170
1440 x 1800	8	60
1680 x 2100	8	60
1920 x 2400	8	60 70 72 75 85
1920 x 2880	8	60 70 72 75 85
2048 x 3072	8	60 70 72 75 85

---

640 x 960	16	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	16	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	16	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16	60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	16	60 70 72 75 85 100 120 140 144 150 170
1440 x 1800	16	60
1680 x 2100	16	60
1920 x 2400	16	60 70 72 75 85
1920 x 2880	16	60 70 72 75 85
2048 x 3072	16	60 70 72 75 85

---

640 x 960	32	60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32	60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	32	60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	32	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1536	32	60 70 72 75 85 100 120 140 144 150 170
1440 x 1800	32	60
1680 x 2100	32	60
1920 x 2400	32	60 70 72 75 85

1920 x 2880	32	60	70	72	75	85
2048 x 3072	32	60	70	72	75	85

## TV-Out Modes Supported by TV Encoders

---

Table A.3 and Table A.4 list the NTSC, PAL, and HDTV TV-Out modes supported by the NVIDIA driver.

**Table A.3** Mode Support for S-Video and Composite Out

Resolution	Bit depth	Comments
320x200	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
320x240	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x400	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x480	8, 16, 32	
720x480	8, 16, 32	Overscans (for video)
720x576	8, 16, 32	Overscans (for video)
800x600	8, 16, 32	
1024x768	8, 16, 32	Conexant 25871 only

**Table A.4** Mode Support for Component YPrPb Out and DVI Out

Resolution	Comments
480i (SDTV)	Supported on graphics boards with Conexant 875 or Philips 7108 TV encoders and compatible connectors, and compatible GeForce 6 Series and GeForce 7 Series GPUs.
480p (EDTV)	
720p (HDTV)	
1080i (HDTV)	
576i (PAL)	
576p (PAL)	

The driver supports manual overscan correction for component and DVI outputs. See the *ForceWare Graphics Driver User's Guide* for instructions on how to use the overscan correction features in the control panel.